

TecLines TNT003 PoE Netzteil – Installation


1. 2x USB-C Buchsen mit **1x Strom** und **1x Strom + Daten**.
2. Bitte zuerst das LAN-Kabel mit dem TNT003 verbinden. Danach das Netzteil mit dem iPad / Tablet verbinden.
3. Bitte achten Sie darauf, dass Ihr PoE Switch oder PoE Injector mindestens den IEEE802.3at (PoE +) Standard unterstützt.
5. Bei einem Verbindungsfehler bitte den USB-C Stecker am TNT003 drehen. USB-C ist im Normalfall rotationssymmetrisch belegt, dies könnte aber bei dem Anschluss Strom + Daten nicht komplett der Fall sein.
6. Bitte folgende iPad Einstellungen aktivieren:

Allow access to USB accessories

You can allow your iOS device to always access USB accessories, for example, if you use a USB assistive device to enter your passcode on your locked iPhone. Many assistive devices will automatically turn on the setting to allow USB devices the first time they're connected.

If you don't connect to USB accessories regularly, you might need to turn on this setting manually.

In Settings, go to Face ID & Passcode or Touch ID & Passcode, and turn on USB Accessories under Allow Access When Locked.

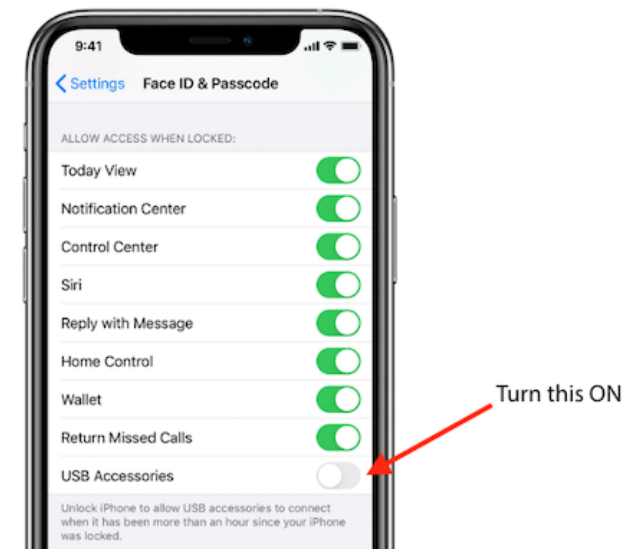

When the USB Accessories setting is off, as in the image above, you might need to unlock your iOS device to connect USB accessories.

Administrators can [control the USB Accessories setting](#) on supervised iOS devices using Apple Configurator or mobile device management.